


Features

- * Complete Voltage Range 3.3 to 200 Volts
- * High peak reverse power dissipation
- * Flat Handling Surface for Accurate Placement
- * Low leakage current



RoHS
COMPLIANT

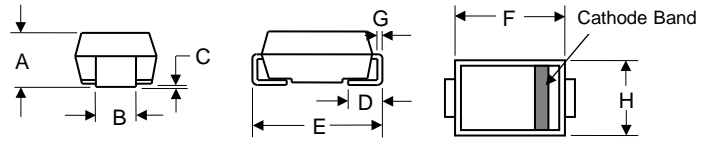

SMB				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.084	0.096	2.13	2.44
B	0.077	0.087	1.95	2.20
C	---	0.008	---	0.203
D	0.030	0.060	0.76	1.52
E	0.205	0.220	5.21	5.59
F	0.160	0.180	4.06	4.57
G	0.006	0.012	0.152	0.305
H	0.130	0.155	3.30	3.94

Mechanical Data

- * Case : SMB (DO-214AA) Molded plastic
- * Epoxy : UL94V-0 rate flame retardant
- * Lead : Lead formed for Surface mount
- * Polarity : Color band denotes cathode end
- * Mounting position: Any

Absolute Maximum Ratings (T_A=25°C unless otherwise noted)

Rating	Symbol	Value	Unit
Maximum Steady State Power Dissipation at T _L = 75°C, Measured at Zero Lead Length Derate Above 75 °C	P _D	3.0 40	W mW/°C
Thermal Resistance From Junction to Lead	R _{θJL}	25	°C/W
Maximum Steady State Power Dissipation at T _a = 25 °C Measured at Zero Lead Length Derate Above 25 °C	P _D	550 4.4	mW mW/°C
Thermal Resistance From Junction to Ambient	R _{θJA}	226	°C/W
Maximum Forward Voltage at I _F = 200 mA	V _F	1.5	Volts
Junction Temperature Range	T _J	- 65 to + 150	°C
Storage Temperature Range	T _{stg}	- 65 to + 150	°C

Electrical Characteristics (T_A=25°C unless otherwise noted)

TYPE	Marking Code	Nominal Zener Voltage		Maximum Zener Impedance			Maximum Reverse Leakage Current		Maximum DC Zener Current
		V _Z @ I _{ZT}	I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZK} @ I _{ZK}	I _{ZK}	I _R @ V _R		I _{ZM}
		(V)	(mA)	(Ω)	(Ω)	(mA)	(μA)	(V)	(mA)
1SMB5913B	913B	3.3	113.6	10	500	1.0	100	1.0	454
1SMB5914B	914B	3.6	104.2	9.0	500	1.0	75	1.0	416
1SMB5915B	915B	3.9	96.1	7.5	500	1.0	25	1.0	384
1SMB5916B	916B	4.3	87.2	6.0	500	1.0	5.0	1.0	348
1SMB5917B	917B	4.7	79.8	5.0	500	1.0	5.0	1.5	319
1SMB5918B	918B	5.1	73.5	4.0	350	1.0	5.0	2.0	294
1SMB5919B	919B	5.6	66.9	2.0	250	1.0	5.0	3.0	267
1SMB5920B	920B	6.2	60.5	2.0	200	1.0	5.0	4.0	241
1SMB5921B	921B	6.8	55.1	2.5	200	1.0	5.0	5.2	220
1SMB5922B	922B	7.5	50.0	3.0	400	0.5	5.0	6.0	200
1SMB5923B	923B	8.2	45.7	3.5	400	0.5	5.0	6.5	182
1SMB5924B	924B	9.1	41.2	4.0	500	0.5	5.0	7.0	164
1SMB5925B	925B	10	37.5	4.5	500	0.25	5.0	8.0	150
1SMB5926B	926B	11	34.1	5.5	550	0.25	1.0	8.4	136
1SMB5927B	927B	12	31.2	6.5	550	0.25	1.0	9.1	125
1SMB5928B	928B	13	28.8	7.0	550	0.25	1.0	9.9	115
1SMB5929B	929B	15	25.0	9.0	600	0.25	1.0	11.4	100
1SMB5930B	930B	16	23.4	10	600	0.25	1.0	12.2	93
1SMB5931B	931B	18	20.8	12	650	0.25	1.0	13.7	83
1SMB5932B	932B	20	18.7	14	650	0.25	1.0	15.2	75
1SMB5933B	933B	22	17.0	17.5	650	0.25	1.0	16.7	68
1SMB5934B	934B	24	15.6	19	700	0.25	1.0	18.2	62
1SMB5935B	935B	27	13.9	23	700	0.25	1.0	20.6	55
1SMB5936B	936B	30	12.5	26	750	0.25	1.0	22.8	50
1SMB5937B	937B	33	11.4	33	800	0.25	1.0	25.1	45
1SMB5938B	938B	36	10.4	38	850	0.25	1.0	27.4	41
1SMB5939B	939B	39	9.6	45	900	0.25	1.0	29.7	38
1SMB5940B	940B	43	8.7	53	950	0.25	1.0	32.7	34
1SMB5941B	941B	47	8.0	67	1000	0.25	1.0	35.8	31
1SMB5942B	942B	51	7.3	70	1100	0.25	1.0	38.8	29
1SMB5943B	943B	56	6.7	86	1300	0.25	1.0	42.6	26
1SMB5944B	944B	62	6.0	100	1500	0.25	1.0	47.1	24
1SMB5945B	945B	68	5.5	120	1700	0.25	1.0	51.7	22
1SMB5946B	946B	75	5.0	140	2000	0.25	1.0	56.0	20
1SMB5947B	947B	82	4.6	160	2500	0.25	1.0	62.2	18
1SMB5948B	948B	91	4.1	200	3000	0.25	1.0	69.2	16
1SMB5949B	949B	100	3.7	250	3100	0.25	1.0	76.0	15
1SMB5950B	950B	110	3.4	300	4000	0.25	1.0	83.6	13
1SMB5951B	951B	120	3.1	380	4500	0.25	1.0	91.2	12
1SMB5952B	952B	130	2.9	450	5000	0.25	1.0	98.8	11
1SMB5953B	953B	150	2.5	600	6000	0.25	1.0	114.0	10
1SMB5954B	954B	160	2.3	700	6500	0.25	1.0	121.6	9.0
1SMB5955B	955B	180	2.1	900	7000	0.25	1.0	136.8	8.0
1SMB5956B	956B	200	1.9	1200	8000	0.25	1.0	152.0	7.0

Note : (1) Suffix " B " indicates ± 5% tolerance, suffix " A " indicates ± 10% tolerance

Ratings and Characteristic Curves

FIG. 1 - POWER TEMPERATURE DERATING CURVE

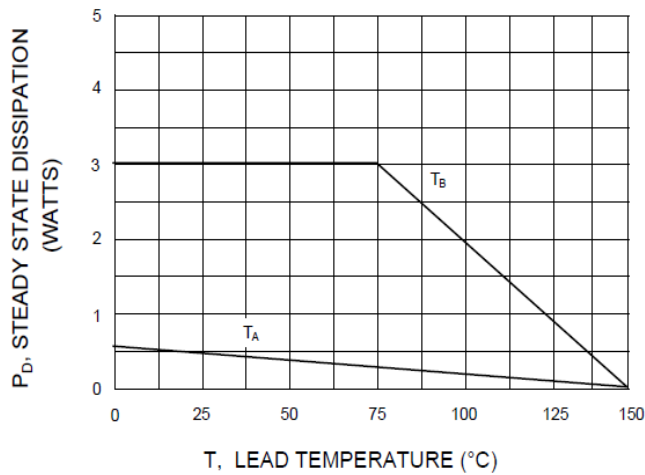


FIG. 3 - MAXIMUM SURGE POWER

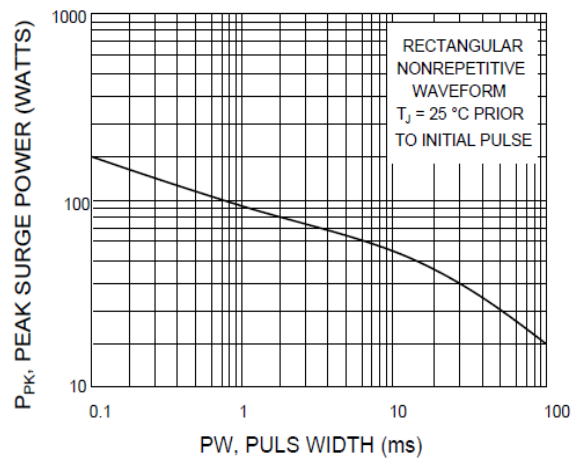


FIG. 5 - TEMPERATURE COEFFICIENT RANGES UNITS TO 12 VOLTS

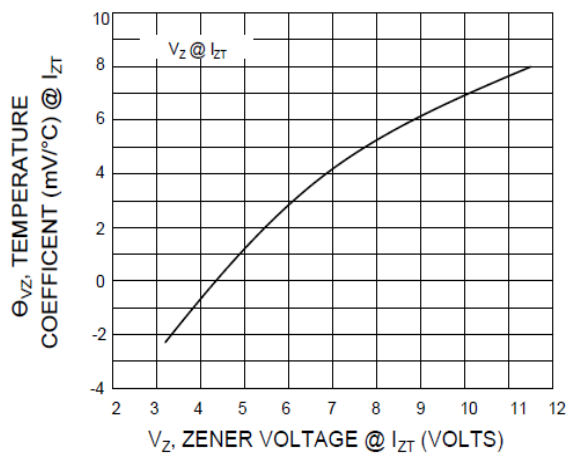


FIG. 6 - TEMPERATURE COEFFICIENT RANGES UNITS 10 TO 400 VOLTS

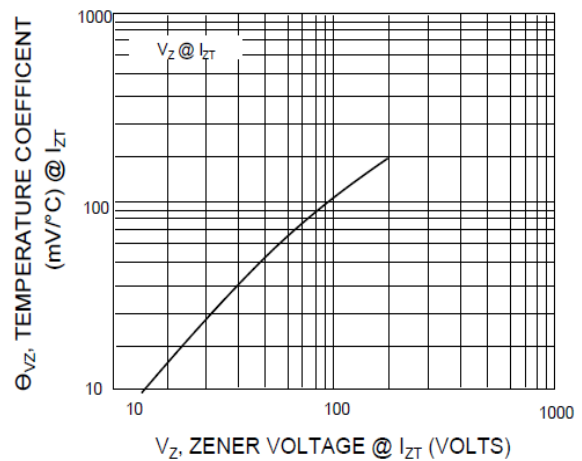


FIG. 7 - ZENER VOLTAGE VS. ZENER CURRENT $V_Z = 3.3$ thru 10 VOLTS


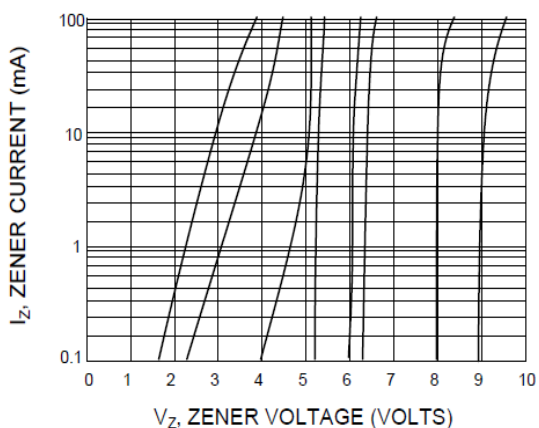


FIG. 8 - ZENER VOLTAGE VS. ZENER CURRENT $V_Z = 12$ thru 82 VOLTS



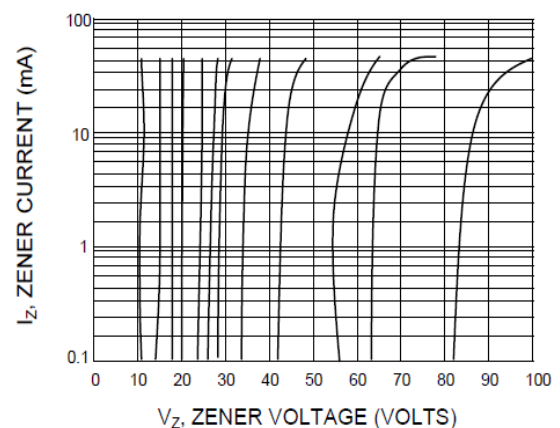

1SMB5913B THRU 1SMB5956B

Surface Mount Zener Diodes

Ordering Information

Part No.	Package	Packing Code	Packing
1SMB5913B THRU 1SMB5956B	SMB	R30	3000pcs/Reel

Disclaimer

Specifications of the products displayed herein are subject to change without notice. JGD or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in JGD's terms and conditions of sale for such products, JGD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of JGD products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify JGD for any damages resulting from such improper use or sale.